

AC1300 Dual Band High Gain Wireless USB Adapter

Archer | BL-WDN1300H



AC1300M
High Speed



2.4G+5G
Dual Band



2X High Gain
Antennas



USB
Super Speed



MU-MIMO



Wi-Fi
Encryption

Features

AC1300Mbps High Speed 5G

USB Wifi Adapter for PC, 802.11AC Wifi USB, Dual Band WiFi Dongle, up to 867Mbps on 5GHz band or 400Mbps on 2.4GHz band.

Dual High Gain Wi-Fi Antennas

Greatly enhances the reception and transmission signal strength. 180° rotatable antenna provides a stronger wireless transmission and receives signal.


MU-MIMO

Uses MU-MIMO technology to provide two simultaneous data streams. MU-MIMO technology boosts connection speed when multiple compatible clients are online.

Super USB

WiFi adapter for PC, using the USB interface. Works more stable and 10 times faster, Wireless USB adapter brings 10 times faster and more solid wireless network connection.



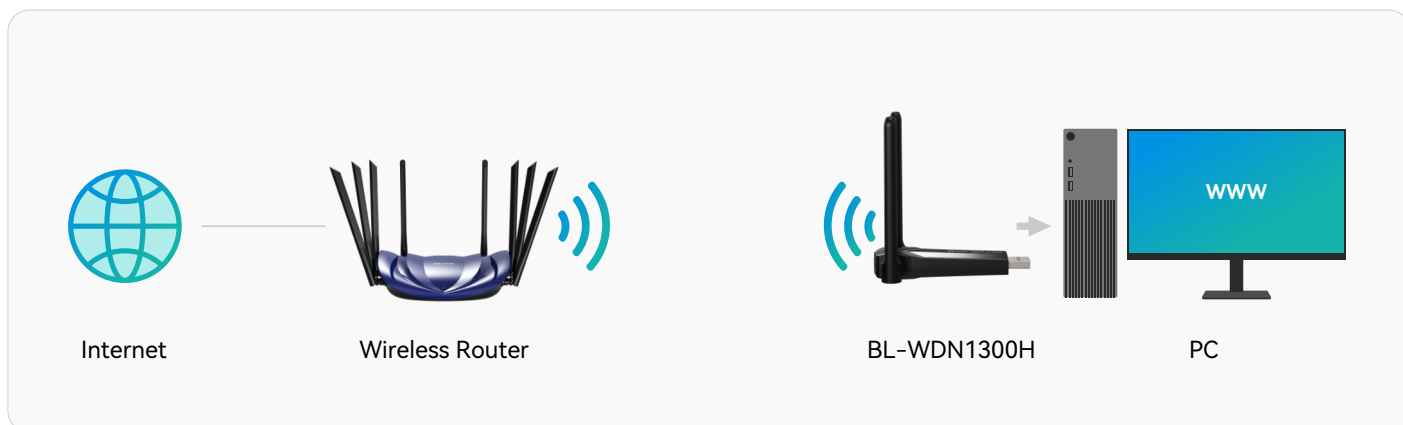

Specifications

Interface	USB
Antenna Type	External Antenna
Antenna Gain	2dBi
Wireless Standards	IEEE802.11b/g/n IEEE802.11a/n/ac
Frequency	2.4~2.4835GHz 5.150~5.250GHz 5.725~5.850GHz
Signal Rate	1167Mbps (2.4GHz 400Mbps, 5GHz 867Mbps)
Tx Power	20dBm (Max)
Wireless Modes	Station/soft AP
Wireless Security	Support 64/128 bit WEP,WPA/WPA2,WPA-PSK/WPA2-PSK(TKIP/AES)
Modulation Technology	OFDMA/OFDM/CCK/16-QAM/64-QAM/256-QAM
System Requirements	Win10/Win11
Operating Environment	Operating temperature: 0°C~40°C (32°F~104°F) Storage temperature: -40°C~70°C (-40°F~158°F) Operating humidity: 10%-90% RH Without condensation Storage humidity: 5%-90% RH No condensation

